



# Box Chimney Cookerhood


## BE1900



### BE1900 - Box Chimney Cookerhood

### Installation

#### Features

- Extraction or Recirculation operation
-  Electronic soft buttons control
- Number of speeds : 3 + 1 intensive
- Stainless Steel ProVent filter (grease filtration over 90%)
- Colour : Stainless Steel

#### Technical Information

- Extraction flow : 950 m<sup>3</sup>/hr
- Number of motor : 1
- Number of lamp : 2 x 20W (halogen lamp)
- Length of chimney (lower / upper) : 685 / 215 mm
- Diameter of air duct : 150 mm
- Socket / Fuse spur unit : 13A
- Length of power cord : 1000mm

#### Product Dimensions (mm)


- 795-935H x 898W x 485D

#### Country of Origin


- Italy

\* Carbon filter is needed for recirculation type.

#### Extraction type installation :

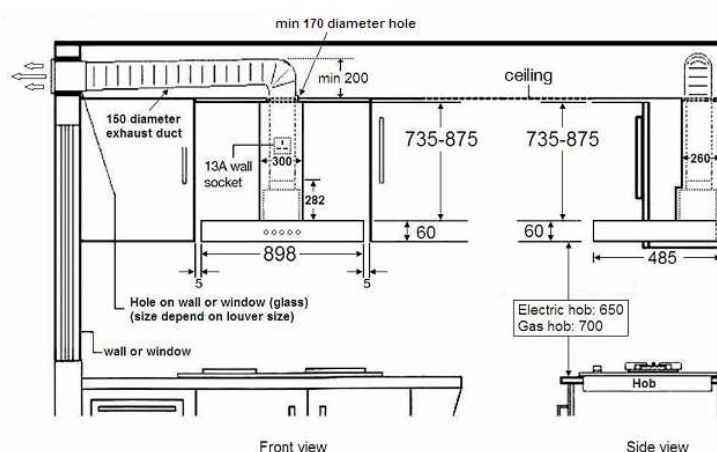

#### Recirculation type installation :

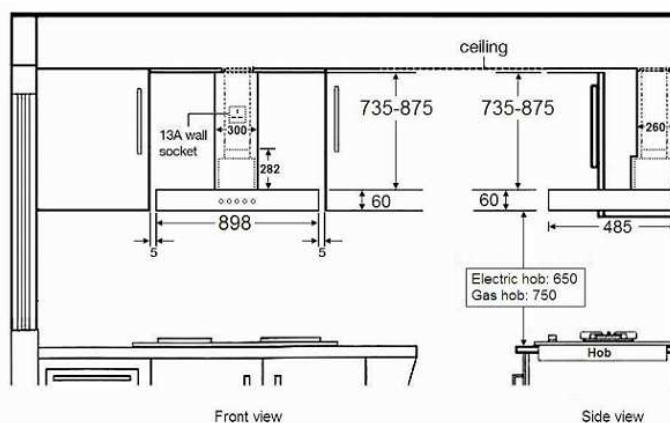

\*\* Carbon filter is needed for recirculation type.

Unit: mm  
Above diagram is not to scale